



# Traffic Advisor™

## *Directional Lighting*

Whelen's Traffic Advisor light arrays are designed to safely direct approaching traffic on the back of the vehicle. Straight or arrow style models are available with fully encapsulated lightheads and hard-coated lenses for optimal durability.

### *FEATURES*

- Black extruded aluminum housing
- Hard-coated lenses minimize environmental damage from sand, sun, salt, and road chemicals
- Lightheads are fully encapsulated for moisture, vibration, and corrosion resistance
- Left arrow, right arrow, split arrow, and warning functions
- Rear dip switch provides eight flash patterns
- Hi/Low intensity control
- Five year warranty



# Traffic Advisor™ - Straight Style

- Interior or exterior applications
- 15' cable standard, alternate cable lengths available, contact factory

TAD8RB



TADP8RB



TADP8



Model	Technology	Modules	Cable	End Flasher	Mount	Control Head	VDC	Size	Length
TAD6	Dominator™ TIR3™ Super-LED®	6	20'	No	Surface/slide bolt	Less control head, requires optional TADCTL1 or customer supplied switches (see options)	12	1.74" (44mm) H x 2.17" (55mm) D	23.26" (59cm)
TAD8		8		Yes, Red, Blue and/or Amber					30.36" (77cm)
TAD8**		6		No					23.26" (59cm)
TADP6	8	Yes, Red, Blue and/or Amber		30.36" (77cm)					
TADP8	8	No		Rear Deck, 2013-2018 Ford Police Interceptor	37.37" (95cm)				
TADP8**	8	Yes, Red, Blue and/or Amber							
TADP8FT	Dominator Plus™ LINZ6™ Super-LED	8	No						

TAM83



TAM83RB



TAZ86RB



Model	Technology	Modules	Cable	End Flasher	Mount	Control Head	VDC	Size	Length				
TAM63	TIR3, Three Super-LED lightheads per panel	6	15'	No	Surface/slide bolt	TACTL5 included	12	1.74" (44mm) H x 2.17" (55mm) D	23.26" (59cm)				
TAM83		8		Yes, Red, Blue and/or Amber					30.36" (77cm)				
TAM83**		6		No					48" (122cm)				
TAM8348	8	Yes, Red, Blue and/or Amber		23.26" (59cm)									
TAZ66	LINZ6, Six Super-LED lightheads per panel	6		20'	No				Surface / rear PEM nuts/ thru-bolt endcaps	TACTL5 included	12 or 24	2.84" (73mm) H x 2.25" (57mm) D	23.26" (59cm)
TAZ86		8			Yes, Red, Blue and/or Amber								30.36" (77cm)
TAZ86**		6	No										

TAL65



TAL85



Model	Technology	Modules	Cable	End Flasher	Mount	Control Head	VDC	Size	Length
TAL65	500 Series 5 mm LED	6	15'	No	Surface / rear PEM nuts/ thru-bolt endcaps	TACTL5 included	12 or 24	2.84" (73mm) H x 2.25" (57mm) D	36" (91cm)
TAL85		8							46.82" (119cm)

TAM65



TAM85 / TAM85AA



Model	Technology	Modules	Cable	End Flasher	Mount	Control Head	VDC	Size	Length
TAM65	500 Series TIR6™ Super-LED	6	15'	No	Surface / rear PEM nuts/ thru-bolt endcaps	TACTL5 included	12	2.84" (73mm) H x 2.25" (57mm) D	36" (91cm)
TAM85		8		Yes, Red, Blue and/or Amber					46.82" (119cm)
TAM85**		8		Yes, Red, Blue and/or Amber					



\* Replace with A=Amber, B=Blue, R=Red, C= White





Model	Technology	Modules	Cable	End Flasher	Mount	Control Head	VDC	Size	Length
TA4437M	500 Series TIR6™ Super-LED®	8	15'	No	Rectangular aluminum housing, two piece	TACTL5 included	12	2.46" (6.24 cm) H x 4.41" (11.2 cm) D	21.875" (55.56 cm)
TA4437M1			30'						
TA4437M2			50'						
TA45B72	700 Series Linear-LED® Super-LED		35'		Carriage bolts with stainless steel hardware, surface mount			4.35" (88.9 cm) H x 4.17" (10.59 cm) D	72" (182.88 cm)

## TAC8 Series



- Eight front-loaded Super-LED modules
- Built-in left arrow, right arrow, split arrow, and warning functions
- Includes nine directional sequences and nine Scan-Lock® flash patterns
- LED modules are sealed units (IP67 rated)
- Control head features an auxiliary control for a device up to 6A
- Available with a 15', 30', or 50' cable


Model	Technology	Modules	Cable	Mount	Control Head	VDC	Size	Length
TAC815	TAC8 Series Super-LED	8 Front Load	15'	Slide bolt via top, rear, or bottom channel	TAC8 included	12	Light array: 2" (50mm) H x 2-5/8" (67mm) D Control head: 3" (76mm) H x 5-7/8" (149mm) W x 7/8" (22mm) D	47.75" (121cm)
TAC830			30'					
TAC850			50'					

## Straight Style - Front Load



Model	Technology	Modules	Cables	End Flasher	Mount	Control Head	VDC	Size	Length
TANF65	500 Series Linear-LED	6	15'  (optional custom lengths available)	No	Surface/ slide bolt	TACTL5 included	12	2.38" (60mm) H x 2-3/8" (60mm) D	34" (86cm)
TANF85		8		Yes, Red, Blue and/or Amber					45.12" (115cm)
TANF85**				No					
TACF85	CON3™ Super-LED	8		No					
TACF85**				Yes, Red, Blue and/or Amber					

## Front Load DUO™ Color



Model	Technology	Modules	Cables	End Flasher	Mount	Control Head	VDC	Size	Length
TADF6	DUO™ Color Linear Super-LED®	6	20'	No	4 stainless steel slide bolts with hardware to surface mount	No special control head required	12	2.35" (59mm) H x 2.38" (60mm) D	37" (94cm)
TADF8		8							45.12" (115cm)
TDP\$S\$S\$0		6 or 8							-




\* Replace with A=Amber, B=Blue, R=Red, C= White

§ Replace each "\$" symbol in the model number with the total number of each warning DUO Color module needed, in the order of Red-Amber / Blue-Amber / Amber-Amber / White-Amber.



# Traffic Advisor™ Arrow Style

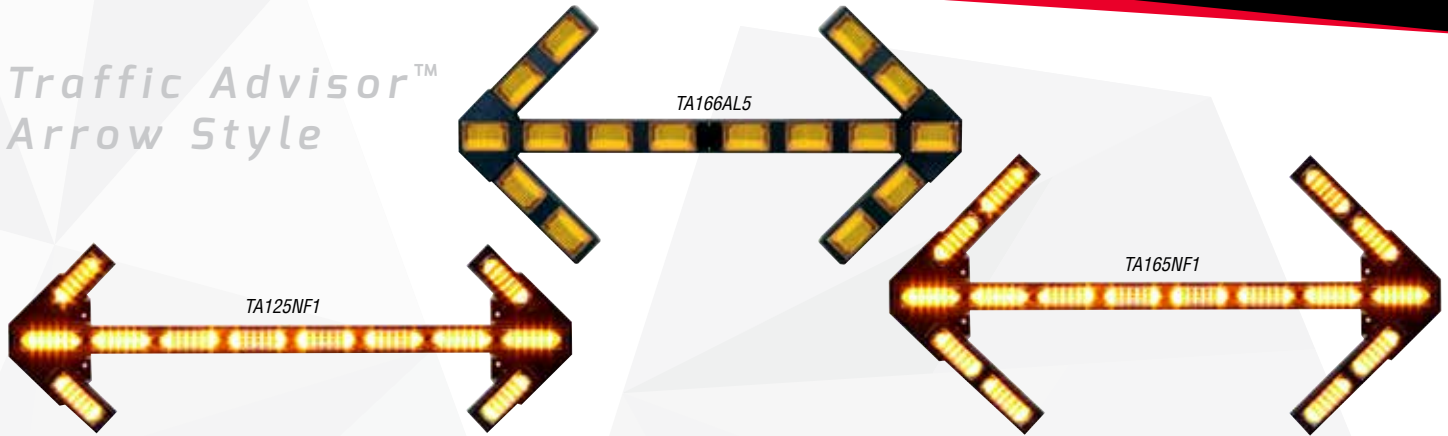

Model	Technology	Modules	Connectors	Cable	Mount	Control Head	VDC	Size
TA125NF1	500 Series Front Load Amber	12	Waterproof Deutch	26'	Surface mount/ slide bolt	TACTL6 included	12	15" (381mm) H x 3.5" (89mm) D x 46" (117cm) L
TA125NF2				51'				23" (584mm) H x 3.5" (89mm) D x 46" (117cm) L
TA165NF1	Linear Super-LED®	16	Waterproof	26'				36.5" (927mm) H x 4" (102mm) D x 5.5" (167.5cm) L
TA165NF2				51'				36.5" (927mm) H x 4" (102mm) D x 5.5" (167.5cm) L
TA166AL5	600 Series Amber 5mm LED							

## Substitute Cables

Replaces Standard Length Cables, Not for use in Sequence to Solid or Sequence On/Off Flash Patterns

Model	Description	Model	Description
STA155	TA166AL5 - Substitute 55' Cable for Standard 51' Cable	STA555	TAM63/TAM83/TAZ66/TAZ86 - Substitute 55' Cable for Standard 15' Cable
STA235	TAL65/TAM65 - Substitute 35' Cable for Standard 15' Cable	STA635	TAD6/TAD8/TADP6/TADP8 - Substitute 35' Cable for Standard 15' Cable
STA245	TAL65/TAM65 - Substitute 45' Cable for Standard 15' Cable	STA735	TADF6/TADF8 - Substitute 35' Cable for Standard 15' Cable
STA255	TAL65/TAM65 - Substitute 55' Cable for Standard 15' Cable	STA745	TADF6/TADF8 - Substitute 45' Cable for Standard 15' Cable
STA335	TAL85/TAM85 - Substitute 35' Cable for Standard 15' Cable	STA755	TADF6/TADF8 - Substitute 55' Cable for Standard 15' Cable
STA345	TAL85/TAM85 - Substitute 45' Cable for Standard 15' Cable	STA835	TACF85/TANF65/TANF85 - Substitute 35' Cable for Standard 15' Cable
STA355	TAL85/TAM85 - Substitute 55' Cable for Standard 15' Cable	STA845	TACF85/TANF65/TANF85 - Substitute 45' Cable for Standard 15' Cable
STA445	TA45B72 - Substitute 45' Cable for Standard 35' Cable	STA855	TACF85/TANF65/TANF85 - Substitute 55' Cable for Standard 15' Cable
STA455	TA45B72 - Substitute 55' Cable for Standard 35' Cable	STA935	TACF85**/TANF85** - Substitute 35' Cable for Standard 15' Cable
STA535	TAM63/TAM83/TAZ66/TAZ86 - Substitute 35' Cable for Standard 15' Cable	STA945	TACF85**/TANF85** - Substitute 45' Cable for Standard 15' Cable
STA545	TAM63/TAM83/TAZ66/TAZ86 - Substitute 45' Cable for Standard 15' Cable	STA955	TACF85**/TANF85** - Substitute 55' Cable for Standard 15' Cable

## Accessories

Model	Description
TACTL5	Control head only, programmable for 6 or 8 lamp halogen or LED Traffic Advisor, includes auxiliary On/Off switch
TACTL6	Control head only, programmable for 16 lamp halogen or LED Traffic Advisor, includes auxiliary On/Off switch. Meets federal standards
TADCTL1	TAD/TADP Dominator Traffic Advisor Series control head only
TADSW1	On/Off non-lighted, SPDT 20 amp switch, TADCTL1 control head
TADSW2	On/Off/On non-lighted, SPDT 20 amp switch, for TADCTL1 control head
TANBKT1	Mount for top of vehicle for TACF85 and TANF85 horizontal mount



\* Replace with A=Amber, B=Blue, R=Red, C= White

**WHELEN®**

51 Winthrop Road  
Chester, Connecticut 06412-0684  
(860) 526-9504 www.whelen.com

Whelen Engineering reserves the right to upgrade and improve products without notice.  
© 2018 Whelen Engineering Company, Inc. Printed in U.S.A.  
NASCAR® is a registered trademark of the National Association for Stock Car Auto Racing, Inc.  
Code No. 13316B - 11/28/2018

**WHELEN®**  
OFFICIAL WARNING LIGHTS



All products proudly designed, manufactured,  
and assembled in the U.S.A.  
• ISO 9001 Registered QMS